

Fiberline HD Clip

Custom-made bracket for mounting Fiberline HD plank on substructures of steel or fibreglass. The bracket is bolted through the flanges, thus ensuring a stable load transmission. The bracket is designed to be fitted anywhere under the plank and it is not necessary to push it from one side.

Installation guide

Angle the clip between the legs of the HD plank. Push the bracket right up to the pre-drilled hole in the flange

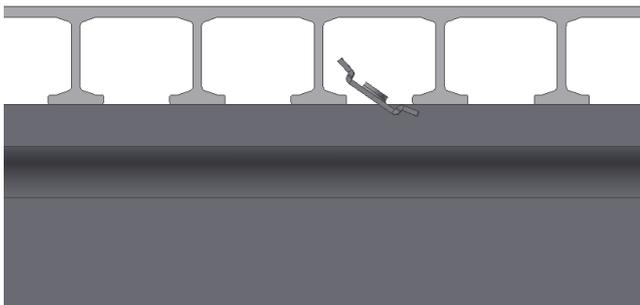


Figure 1

Straighten the bracket and pull it down to the feet of the plank. Make sure that the bracket is in the middle of the legs.

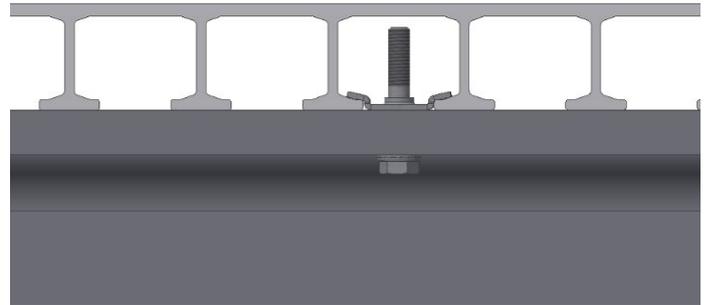


Figure 2

Move the bracket assembly towards the substructure and tighten the bolt to 5 Nm.

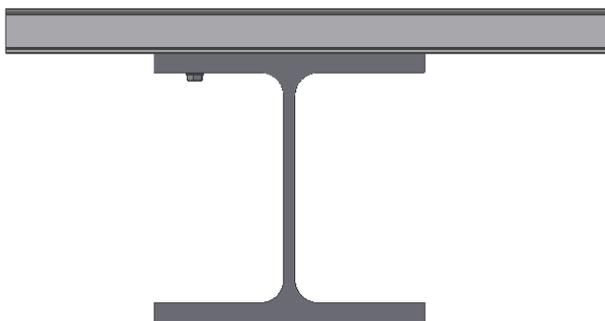


Figure 3

We advise fastening the plank with two HD Angles in the 3rd and 8th cavities as shown in figure 4.



Figure 4

Components of the HD Clip

Figure 5

